



# No-Contact Coupling



(Patent Pending)

Product Release

05/2017

Ideal for connecting existing lead plumbing lines to other service line materials, the No-Contact Lead-Pak Coupling prevents direct contact of the lead plumbing line with other metallic water system components. This design mitigates the possibility of galvanic corrosion.

No-Contact Lead-Pak compression couplings employ proven Pack-Joint performance and complement Ford's extensive line of waterworks coupling solutions.

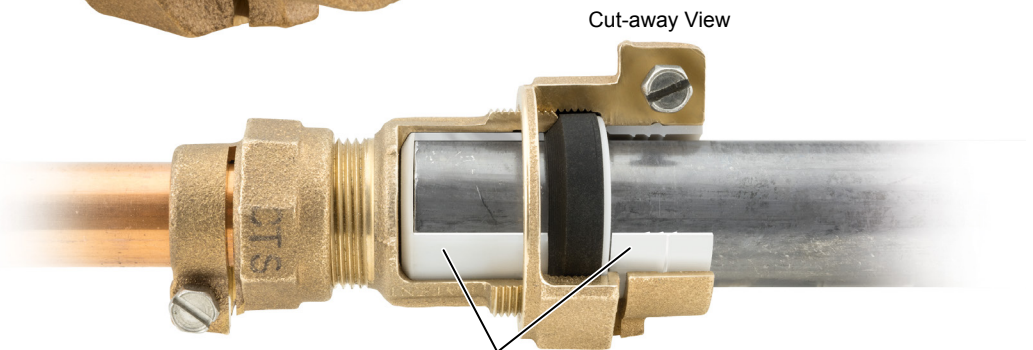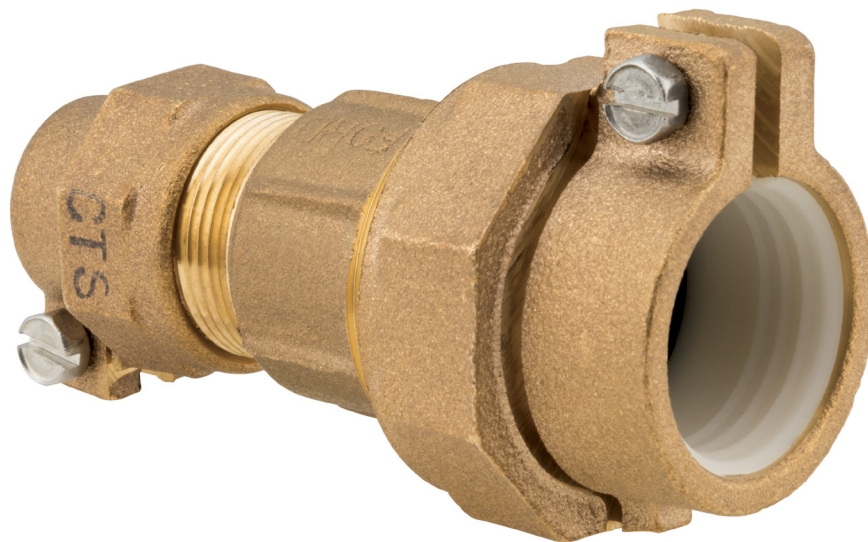

Permanently installed plastic gripper ring and sleeve liner prevent direct contact between lead pipe material and other metallic water system components

CATALOG NUMBER	DESCRIPTION		
* Q11-33-Q31-23-NC-NL	5/8" dbl. extra strong lead (XXS) or 3/4" strong lead (S)	x	3/4" female iron pipe thread
* Q14-33-Q34-23-NC-NL	5/8" dbl. extra strong lead (XXS) or 3/4" strong lead (S)	x	3/4" cop. or plastic tubing (CTS)
* Q18-33-Q38-23-NC-NL	5/8" dbl. extra strong lead (XXS) or 3/4" strong lead (S)	x	3/4" male iron pipe threads
Q22-33-NC-NL	3/4" extra strong lead (XS)	x	3/4" flare copper
Q22-34-NC-NL	3/4" extra strong lead (XS)	x	1" flare copper
Q24-33-NC-NL	3/4" extra strong lead (XS)	x	3/4" cop. or plastic tubing (CTS)
Q24-34-NC-NL	3/4" extra strong lead (XS)	x	1" cop. or plastic tubing (CTS)
Q28-33-NC-NL	3/4" extra strong lead (XS)	x	3/4" male iron pipe threads
Q21-44-NC-NL	1" extra strong lead (XS)	x	1" female iron pipe thread
Q22-44-NC-NL	1" extra strong lead (XS)	x	1" flare copper
Q24-44-NC-NL	1" extra strong lead (XS)	x	1" cop. or plastic tubing (CTS)
Q28-44-NC-NL	1" extra strong lead (XS)	x	1" male iron pipe threads

\*These items fit two types/sizes of lead pipe as shown in the description.

**The Ford Meter Box Company, Inc.** 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443  
 Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 [www.fordmeterbox.com](http://www.fordmeterbox.com)